



*Imagen de referencia.

GU80PS

60Hz@1800RPM 208/120V 3PH

Overall Performance

PRP Continuous Power kVA	68
PRP Continuous Power kW	55
LTP Stand-by power kVA	75
LTP Stand-by power kW	60
Power factor cos φ	0.8
Voltage VAC	208/120
Frequency Hz	60
Ampere PRP/LTP	183/202
Speed RPM	1800

GU80PS

Overall Performance

Length mm	2220
Width mm	960
Height mm	1258
Net Weight kg	1083
Gross Weight kg	1108
Sound pressure at 7 mt dBA	67.00

Silent generator with following specifications:

Frame:

- Heavy duty fabricated welded base plate with high quality steel UNIS235 JR.
- Heavy duty, bell type, rubber anti-vibration mountings
- Fuel tank with drain plug and retention basin
- Feet and four lifting holes on the base
- Oil draining mechanical pump

Canopy:

- Four large doors for easy access for service and maintenance
- Electro-galvanized sheet DC01+ZE25/25(EN10152:2009)
- High precision sheet cutting with nitrogen laser technology to avoid oxidation.
- Sandblasting and cataphoresis treatment of intake / exhaust grids
- Weatherproof sealed joints
- Lockable handles in each door
- RAL 9010 "orange peel" specific powder coat paint for outdoor usage
- Rain cap on exhaust outlet
- Coolant refilling specific hatch
- Fuel filter outside enclosure
- Ecological Sound foam: 100% Recyclable, 35 mm thickness, fire proof self-extinguishing class1 fire-reaction compliant washable, mechanically fixed to the frame

Muffler:

- Residential type
- Integrated in the canopy
- With aluminum coating

Control Panel:

- Metal control panel with protective back cover
- Dedicated area to make easier the electrical connection to the load

All units and components are prototype tested, factory build and production tested. A specific control procedure during the several stages of production ensures long life and reliability.

GU80PS

60Hz@1800RPM 208/120V 3PH

Engine general data

Engine brand	Perkins
Model	1103A-33TG2
PRP Power kW	61.20
LTP Power kW	67.50
Fuel	Diesel
Nr. cylinders	3
Air intake	Turbocharged
Cooling	Water
Cubic capacity l	3.30
Speed regulation	Mechanical
Performance Class - steady state regulator accuracy +/- %	G2 - 0.75
Load Step G1 - KWe	-
Load Step G2 - Kwe	-
Load Step G3 - KWe	-
Voltage VDC	12
Emissions	-

Alternator general data

Alternator Brand	Stamford
Model	S1L2-Y1
Type of excitation	Self-excited
Type of regulation	AVR
Regulator precision +/- %	1.00

Structure data

Type of structure	STRONG
Tank capacity l	100
Retention basin	Yes
Exhaust diameter mm	50

SOLDEPYE

Fuel Consumption

Consumption 25% l./h	5.10
Consumption 25% l./h	8.80
Consumption 25% l./hr	12.50
Consumption 25% l./h	16.60
Autonomy at 75% of load h.	=8 h

Engine liquids and equipment

Type of lubricant	Oil SAE 15W40
Lubrication capacity l.*	8.30
Type of coolant	Antifreeze liquid
Coolant capacity l.*	10.20
Air intake filter	Paper cartridge
Battery capacity Ah.	70
Number of batteries*	1

Fuel system and energy balance

AC pump suction head kPa	2
Combustion air flow volume LTP m3/min	4.90
Cooling air capacity LTP m3/min	111.00
Exhaust gas flow flow-density LTP m3/min	12.50
Exhaust gas temperature LTP °C	564.00
Brake mean effective pressure kPa	15.00
Energy to exhaust LTP kWt	54.00
Energy to coolant LTP kWt	34.00
Energy to radiation LTP kWt	11.00



*Imagen de referencia.

Control panel features



*Imagen de referencia.

Protection cover
Circuit breaker
AMF controler DSE4520

- Voltmeter, frequencymeter, Ammeter
- Generator power (kW, kV, Ar, kV A & pf) monitoring.
- Hour meter
- Fuel level meter
- Overland (kW & kV Ar) protection
- Low oil pressure protection
- Higt coolant temperature protection


- Low fuel level protection
- Battery charger alternator fault
- Rpm protector

- Emergency stop button
- Audible alarm
- Terminal board for ATS connection
- Can Bus reading Port(if Standard on the engine)
- Battery charger
- On/off switch

Data reference

Standardd reference conditions temperature 25 °C, altitude 1-1000m asl, relative humidty 30%, atmospheric pressure 100 kPa (1 bar), power factor 0,8 lag, balanced load - non distortional. Fuel consumption is nominal and refers to specific weight 0,850 gr/lt. Power performance data as quoted can be obtained after the initial running-in period of the engine, during which one has to follow the instructions of the engine manufacturer as stated in the use and maintenance manual of the specific engine. The tolerance shown by the engine manufacturer is +/-5%. Sound power values refer to free field conditions: the installation site may influence the values. Dimensions, weights and other specifications contained in the technical date sheel and related attachments are nominal, subject to tolerances and refer to the model with standard equipment; any optional and additional equipment/accesories can modify weight, domensions, performance, P.R.P. Prime power-continuous power at variable load: The power that a genset can supply in continuous service at variable load for an any number of hours per year while repecting the maintenance intervals established in the envirometal condions stated by the Manufacturer. according to ISO8528-1. The average power supplied over time over time and any the maintenance intervals established in the environmetal conditions stated by the Manufacturer according to ISO 8528-1. The number of hours per year is stated by the Manufacturer. Overload is not permitted. *For reasons of transport and/or Storage, liquids(oli and antifreeze) and batteries not be included in the delivery.

SOLDEPYE

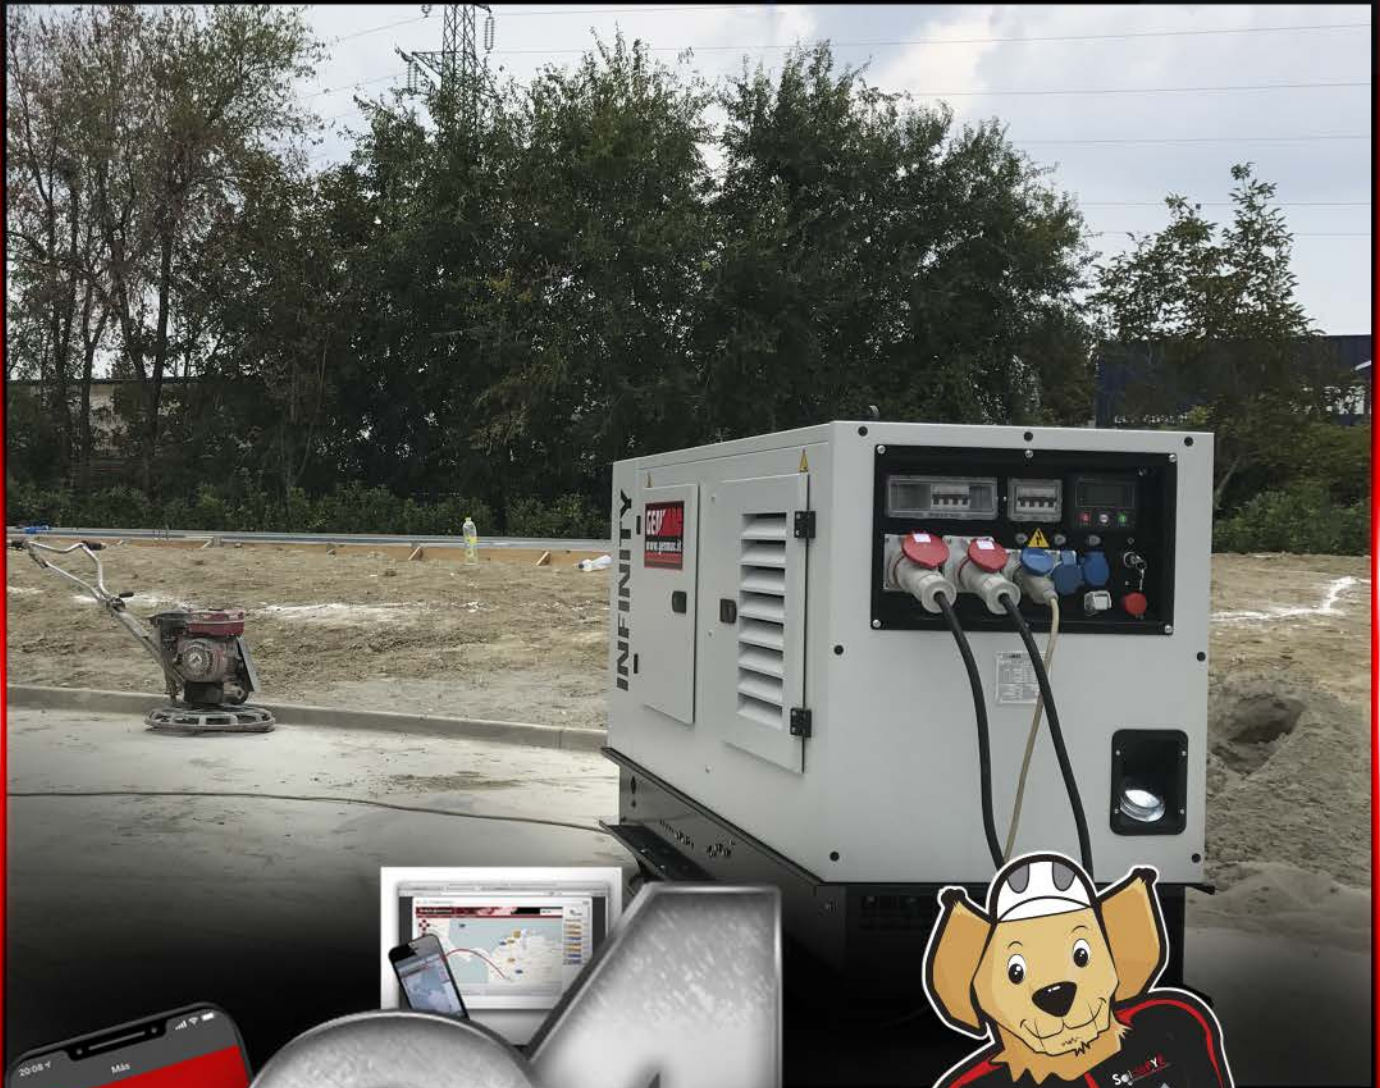

24 HORAS



¡Hablemos!